




Double-Drop Flatbed 48', Air-ride

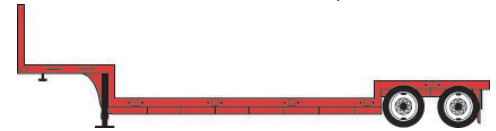

FEATURES AND BENEFITS

All XTRA Lease flatbeds are spec'd to resist damage, ease loading and reduce maintenance costs. Here are just a few of the top features and benefits for this spec.

Loader Friendly

- Cargo Control Combination Winches

Extended Maintenance

- Extended Life Brake Linings
- Synthetic Grease Wheel Ends
- Self-Lubricating Landing Gear

Damage Resistant

- Heavy Duty Rub Rails

SPECIFICATIONS

Overall Length	48'
Overall Width	102"
Deck Height	20" center deck, 40" rear deck
Center Deck Length	29' 4"
Coupler Height	50"
Kingpin Setting	16"
Weight	14,060 lbs. +/- 3% (bulkhead + 275 lbs.)
Suspension	Fixed position tandem axle air-ride suspension. Airbags equipped with self-regulating height control valve and manual dump valve.
Axles	5/8" axle wall, 25,000 lb. capacity with synthetic wheel-end lubricant
Tires	255/70R 22.5 premium radial tires
Wheels	8.25" x 22.5" steel hub-piloted wheels
Brakes	16-1/2" x 7" x 3/4" s-cam, quick-change, extended life brake shoes
ABS	2 sensor / 1 modulator-valve system
Upper Coupler	AAR certified coupler with 1/4" pick-up and 5th-wheel plates. Interior coupler surfaces sealed with corrosion resistant coating
Main Frame	Fabricated high-tensile steel main beams
Side Rails	6" structural steel channel
Rub Rails	2" wide rub rails. Full length both sides, front and rear, reinforced with pipe spools
Stake Pockets	1/4" thick, external steel stake pockets on 24" centers. Full length both sides, front and rear



Double-Drop Flatbed 48', Air-ride

SPECIFICATIONS

Crossmembers	4" steel I-beam crossmembers on 12" centers
Landing Gear	AAR certified, self-lubricating 2-speed landing gear with internal gearbox and cushion sand shoes
Cargo Control	Combination winches and "c" type rope-hooks
Floor	1-1/8" apitong floor
Bulkhead	48" flat, removable bulkhead
Lights & Wiring	Sealed-beam lights with a fully sealed wiring harness and internal ground
Electrical Connections	7-way ATA plug with no circuit breakers
Air Connections	Stationary gladhands mounted on roadside

Trailer specification features may vary based upon manufacturer, model year, trailer type and location.
Equipment is subject to availability at each location.